The 2017 World Congress on
Advances in Structural Engineering and Mechanics (ASEM17)
28 August - 1 September, 2017, Ilsan(Seoul), Korea

Optimization of longitudinal viscous dampers for a freight railway cable-stayed bridge under braking forces

Chuanjin Yu[1)], *Huoyue Xiang[2)] , Yongle Li[3)] , Maosheng Pan[4)]

[1), 2), 3)] *Department of Bridge Engineering, Southwest Jiaotong University, Chengdu, Sichuan 610031, China*
[4)] *China Railway Siyuan Survey and Design Group Co.,Ltd., Wuhan, Hubei 430063,China*
[2)] *hy@swjtu.edu.cn*

ABSTRACT

……Under braking forces of a freight train, there are great longitudinal structural responses of a large freight railway cable-stayed bridge. To alleviate such adverse reactions, viscous dampers are required, whose parametric selection is one of the key researches but always difficult. Based on the longitudinal dynamics vehicle model, responses of a cable-stayed bridge are investigated under various cases. It shows that there is a notable effect of initial braking speeds and locations of a freight train on the structural responses. Under the the most unfavorable braking condition, the parameter sensitivity analyses of viscous dampers acting on the bridge responses are systematically performed. Meanwhile, a mixing method called BPNN-NSGA-II, combining the Back Propagation neural network (BPNN) and Non-Dominated Sorting Genetic Algorithm With Elitist Strategy(NSGA-II), is employed to optimize parameters of viscous dampers. The result shows that: 1. the relationships between the parameters of viscous dampers and the key longitudinal responses of the bridge are high nonlinear, which are completely different from each other; 2. the longitudinal displacement of the bridge main girder significantly decreases by the optimized viscous dampers.

1. INTRODUCTION

As the railway construction forward in China, there are more and more large span cable-stayed railway bridges. Under braking forces, there are large structural responses on such floating-type bridges without any longitudinal constraint between their main girder and pylons.

[1)] Graduate Student
[2)] Lecturer
[3)] Professor
[4)] Senior Engineer

There have been many studies on bridge responses caused by emergency braking forces. However, most of them focused on highway bridges. Kishan and Traill-Nash (Kishan and Traill-Nash 1977) studied the braking effect on a simply supported beam bridge. Gupta and Traill-Nash (Gupta and Traill-Nash 1980) presented impact factors through a ramped braking function of two-axle vehicles. Law and Zhu (Law and Zhu 2005) studied the dynamic behavior of a multi-span non-uniform continuous bridge suffered from the vehicles braking. Based on the routine bridge weight-in-motion (B-WIM) results, Zhao and Uddin (Zhao Zhisong and Uddin Nasim 2013) proposed a method to predict bridge safety and integrity if heavy trucks experience emergency braking on the bridge. In order to reduce the excessive longitudinal vibration of a suspension bridge induced by vehicle braking forces, Yang and Cai developed a mixed control methodology using magnetorheological dampers (Yang M G and CS Cai 2016). About railway bridges, Liu etc. (Liu, Qu, and Pi 2010) studied the Tianxingzhou Yangtze River Bridge, the longest highway and railway floating-type cabled-stayed bridge in the world, subjected to train braking forces. Yin (Yin Cunxin 2000) analyzed longitudinal dynamic responses of the Wuhu Yangtze River Bridge under a heavy haul train . The effect of initial braking speeds and positions of the heavy haul train were illustrated. But the most unfavorable braking condition was not clearly given.

It can be seen that braking forces have an enormous impact on floating-type bridges. To reduce the longitudinal responses, it is strongly necessary to install viscous dampers. The working performances of the viscous dampers are closely linked to their parameters. However, there are many optimization researches on building structures (Shukla and Datta 1999) (Wongprasert and Symans 2004) or on bridges under seismic forces(Tony S. Vader 2007). The probability of the earthquake is smaller than that of the braking of heavy haul trains. Compared to the passenger express railway, the train loads of a long span freight railway cable-stayed bridge are much bigger resulting to significant dynamic responses. About the optimization works on a floating-type cable-stayed bridge suffered from braking forces of heavy haul trains, there were little similar systematically studies(Long and Li 2015).Meanwhile, the influence about initial braking speed and position of heavy haul trains has not been investigated.

Faced to such problems, dynamic responses of a freight railway cable-stayed bridge under braking forces of heavy haul trains are studied herein. Firstly, the most unfavorable braking condition about initial braking speed and position of heavy haul trains is investigated in details. Next, under the most negative case, the effects of viscous damper parameters on the structure responses are systematically discussed. Finally, different from the traditional method, a new hybrid model combined with Back Propagation neural network (BPNN) and Non-Dominated Sorting Genetic Algorithm With Elitist Strategy(NSGA-II), called BPNN-NSGA-II, is proposed to optimize the parameters of viscous dampers.

The rest of this paper is organized as: section 2 introduces the analysis models, section 3 searches the most unfavorable braking condition, section 4 makes the sensitivity analysis of parameters for viscous dampers, and section 5 proposes the optimization models for viscous dampers and make discussions on the results.

2. ANALYSIS MODEL

2.1 *Cable-stayed Bridge*

The general layout of the bridge studied in this paper is shown in Fig. 1. Its system is a longitudinal-floating-type one. The concrete-box main girder is 300 m, which is 13.0 m in width and 4.0 m in height with single track for freight railway. The design vehicle speed is 80 km/h. Three-dimensional finite element model of the bridge is established in ANSYS, where the girders, towers and piers are modeled by Beam4, and cables are modeled by Link8.

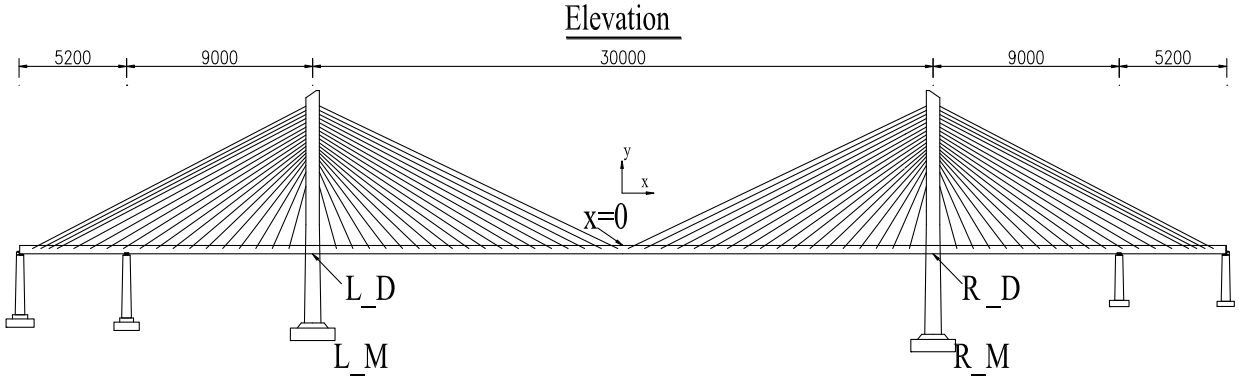

Fig. 1 General layout of the cable-stayed bridge studied in the paper (Unit: cm)
(The relative longitudinal displacement between the left / right tower and the main girder is indicated by *L_D* and *R_D* respectively. And the longitudinal bending moment at the root of the left / right tower is indicated by *L_M* and *R_M* respectively)

2.2 *Viscous damper*

There are four longitudinal viscous dampers installed in the junction of the main girder and the pylons. The mechanism model of viscous damper can be illustrated by Eq. (1) and simulated through the Combin37 in ANSYS(Liu Huailin and Lan Haiyan 2011).

$$F = C_v |v|^n \operatorname{sgn}(v) \tag{1}$$

where, F is the damping force; C_v is the damping coefficient; v is the relative velocity; n is the velocity power function.

2.3 *Braking forces of heavy haul trains*

Heavy haul trains consist of locomotives and trailers connected by couplers and draft gears. It is difficult to build the refined model for that there are many geometric and contacting nonlinearities existing in heavy haul trains. The subject of the study is more concerned with the longitudinal responses of the bridge, instead of the vehicles themselves. Hence, they can be abstracted as a multi-mess spring-damping system. (Chou, Xia, and Kayser 2007) (Cole C 2006). For heavy haul trains, the force condition of a unit (locomotive or trailer) in longitudinal direction can be illustrated as shown in Fig. 2. Balance equation of that is established as follows:

$$M_i \ddot{x}_i = N_{i-1} - N_i - W_i - B_i (i = 1 \cdots m) \tag{2}$$

where M_i, $\ddot{x}_i$, B_i and W_i are the mass, the acceleration, the braking force and the basic resistant force of the i^{th} vehicle, N_{i-1} and N_i are coupler forces of the i^{th} adjacent vehicles.

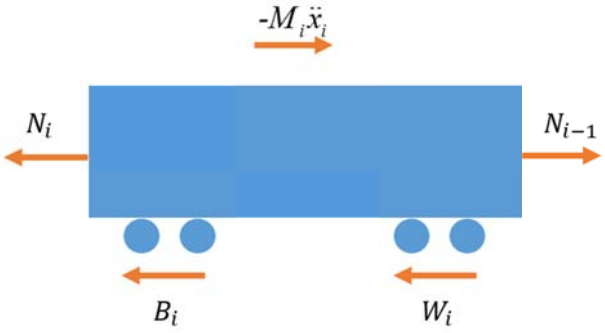

Fig. 2 Dynamic model of a unit of train in the longitudinal direction

In this study, the number of locomotive and trailers is 1 and 20, respectively. More specific details can be referred to the Ref (Train Traction Calculation Procedure 1998). After calculation, the time histories of the heavy haul train braking forces for all vehicles is shown in Fig. 3 when initial train breaking speed is 80km/h.

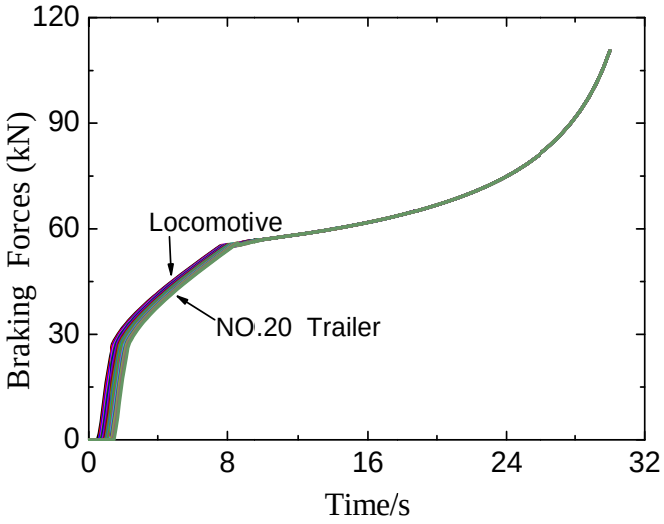

Fig.3 Time history of braking forces (initial braking speed= 80km/h)

3. UNFAVORABLE BRAKING CONDITION

There are great responses of the bridge subjected to the train braking forces, especially the longitudinal displacement(Long and Li 2015). But for comprehensive consideration, the relative longitudinal displacement between the tower and the main girder and the longitudinal bending moment at the tower root, which are respectively abbrieveted as L_D, R_D, L_M and R_M as shown in Fig. 1are all taken as indexes to find the most unfavorable braking case.

The effect of braking forces on the bridge is related to the initial braking speed and position of heavy haul trains. The orthogonal experiments are designed to find the influence. The initial speeds are from 10km/h to 80km/h in 10km/h intervals. The coordinate of the bridge is shown in Fig. 1.The initial positions are at -291.7 m, -217.5 m, -150 m, 0 m, 150 m, 217.5 m and 291.7m, respectively corresponding to: the entrance, the 1/8 of the span, the junction of the main girder and the left tower, the mid-span, the junction of the main girder and the right tower, the 1/8 of the span and the

exit. So there are 56 braking typical cases in total. Since the braking process is dynamic and time-varying, the maximum responses are extracted for analysis. The effect of initial braking speed and position on bridge responses are given in Fig.4.

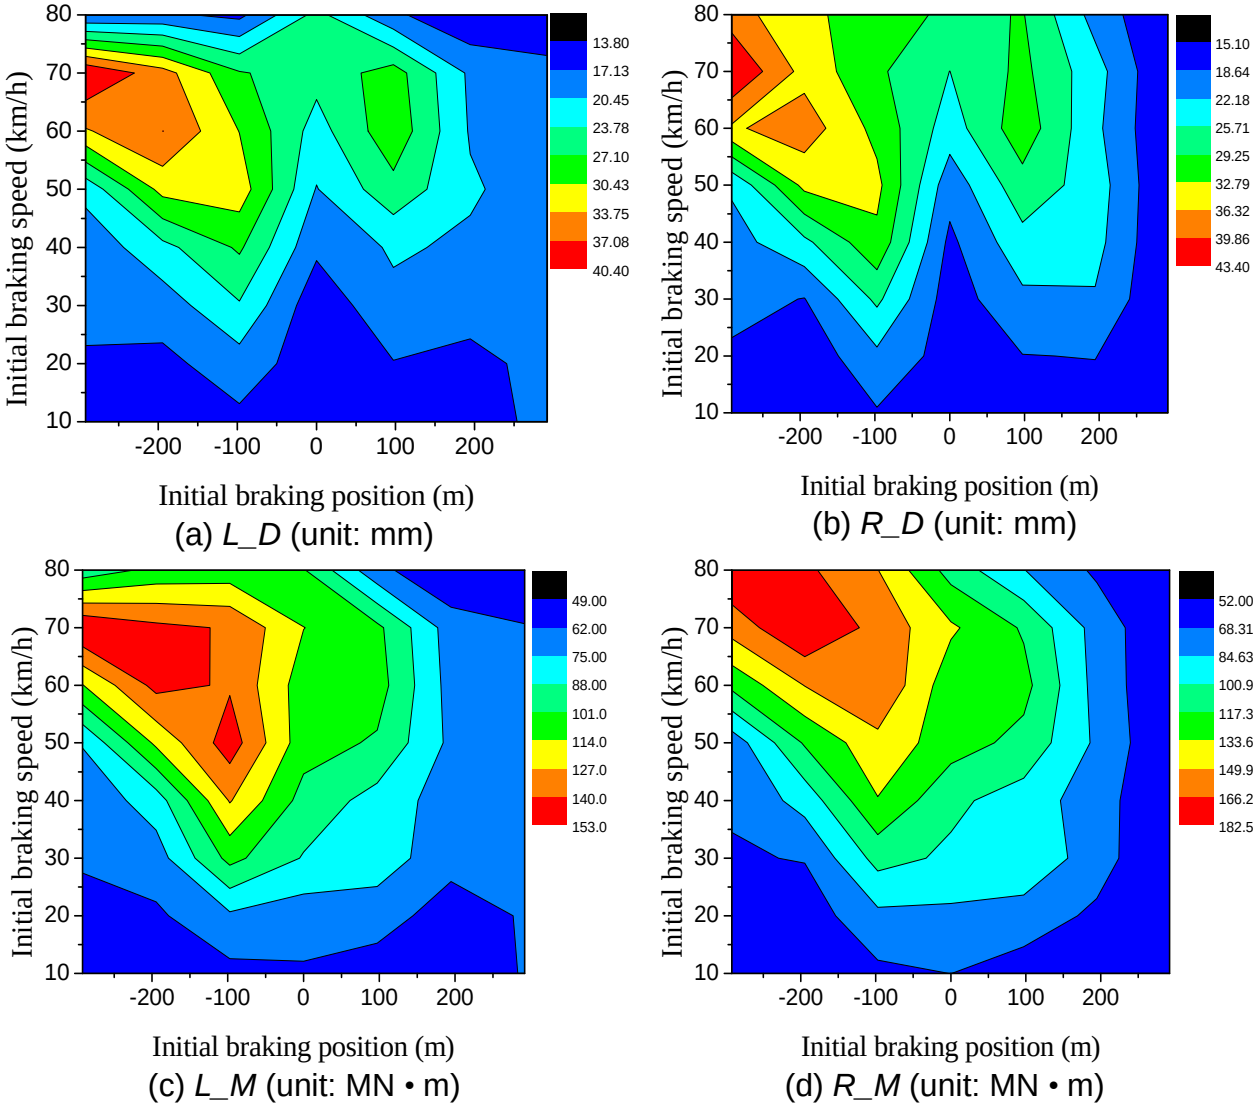

(a) *L_D* (unit: mm)

(b) *R_D* (unit: mm)

(c) *L_M* (unit: MN • m)

(d) *R_M* (unit: MN • m)

Fig. 4 The effect of initial braking speed and position on the relative longitudinal displacement between the towers and the main girder and the bending moment at the root of the towers

From (a) and (b) in Fig.4, the responses, the relative longitudinal displacements between the towers and the main girder, are similar at different speeds smaller than 50km/h, when the trains starts braking in the bridge entrance. With the initial braking speed increasing, the responses become larger. However, it is not true that the higher speed the larger response is. When the initial braking speed is near 70km/h, there is a maximum for *L_D and* R_D respectively. As the train moves forward and brakes, the responses decrease gradually. The responses fall into the minimum when the initial braking position is near the exit, and the initial braking speed has little impact.

From (c) and (d) in Fig.4, when the trains starts braking in the bridge entrance, there is the maximum of the longitudinal bending moment at the root of towers. The

same situation is that the train moves forward and brakes, *L_M* and *R_M* decrease gradually. And the responses also reach the minimum when braking starts near the exit. The initial braking speed has little impact.

From the above analysis, it can be seen that the effect of the initial braking speed and position on the key longitudinal responses of the bridge is great. The higher the speed, does not mean that the larger the structural response is . The initial braking position has a greater effect on the bridge response.After calculation, the most unfavorable braking condition is found: the initial braking speed is 71.9 km/h and the initial braking position is -290.9m. All the follow-up study is under this case.

4. SENSITIVITY ANALYSIS

Based on the the most unfavorable braking condition, the parameter sensitivity analyses of viscous dampers acting on the bridge responses are performed in this section. As shown in Eq. (2), there are two variables of a viscous damper, including Cv and *n*. Another orthogonal test is designed: $C_v \in$ [100, 20000] kN/(m/s), $n \in$ [0.1, 0.9]. Both of the intervals are divided into 20 groups and the total amount of cases is 400. The effect of the viscous dampers on the key longitudinal responses of the bridge, including *L_D,* R_D, *L_M* and *R_M* are shown in Fig. 5.

It can be seen that: a. when C_v is very small, *L_D* is about 0.04m; when C_v is smaller than 14000 kN/(m/s), there is a range of *n* with small values make *L_D* dramatically decrease; when C_v is bigger than 14000 kN/(m/s), *the* difference of *L_D* is very minor regardless of the parameter *n* changes; b. when C_v is bigger than 2000 kN/(m/s) and *n* is smaller than 0.3, *R_D* is at the minimum in stable. *R_D* increases nonlinearly with the raise of *n*, while C_v has little impact; c. there is a minimum of *L_M* when C_v is in the interval from1500 to 8000 kN/(m/s) and *n* is in the range from 0.2 to 0.4. Meanwhile, *L_M* changes nonlinearly outside this area; d. there are two areas to minimize *R_M.* It is hard to illustrate the corresponding regions since they are highly regular. The general scopes are that n is smaller than 0.15 or between 0.25 and 0.4 while C_v is close to or bigger than 4000 kN/(m/s).

On the whole, there is an obvious nonlinear relationship between the parameters of viscous dampers and the key longitudinal responses of the bridge, including *L_D,* R_D, *L_M* and *R_M.* But the impact of the parameters of viscous dampers is very different among different responses. Parametric selection of viscous dampers should be over-all consideration and proper management, otherwise unsuitable parameters may yet cause large responses.

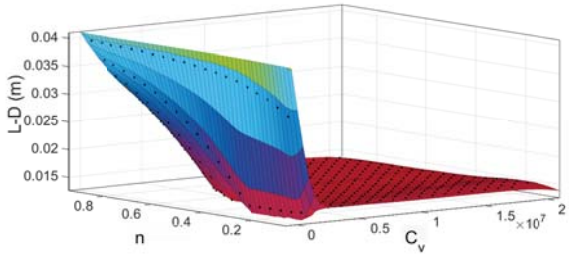

(a) *L_D*

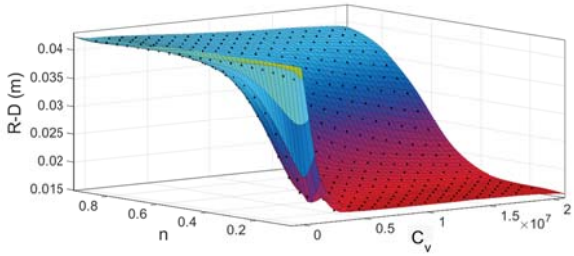

(b) *R_D*

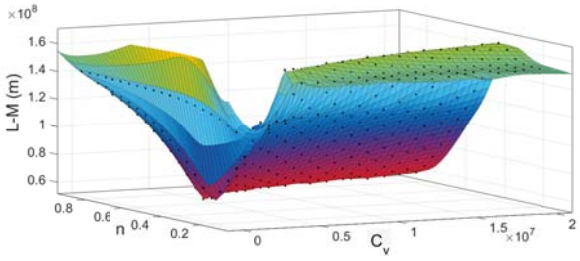

(c) *L_M*

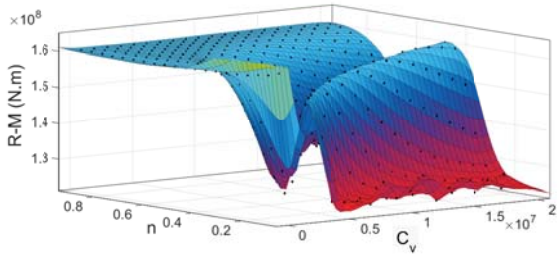

(d) *R_M*

Fig. 5 The effect of the viscous damper on the key longitudinal responses of the bridge

5. OPTIMIZATION

5.1 Optimization model

As mentioned above, the key longitudinal responses of the bridge, including *L_D, R_D*, *L_M* and *R_M* are taken as the optimization goals, as shown in Eq. (3). The optimization objectives in Eq. (3) are complicated implicit functions with highly non-linearity, which should be simulated accurately in an appropriate manner. What's more, since the change laws of the four responses are very different and even inconsistent from each other, the process is a multi-objective optimization.

$$\begin{cases} \text{Min}\ (L_D(C_v,n), R_D(C_v,n), \\ \qquad L_M(C_v,n), R_M(C_v,n)) \\ \text{s.t.:} \\ 100<C_v<20000\left(\text{kN/(m/s)}\right) \\ 0.1<n<0.9 \end{cases} \tag{3}$$

5.2 Optimization method: BPNN-NSGA-II

In order to search the optimum parameters of the viscous dampers, a hybrid method BPNN-NSGA-II combined with BPNN and NSGA-II is proposed. In this hybrid method, BPNN is employed to simulate the key longitudinal responses of the bridge and taken as the objective functions, while the NSGA-II is applied to do multi-objective optimization.

5.2.1 BPNN

BPNN is the one of the most popular and most widely used Artificial Neural Networks with quite completely theory system and learning mechanism. The typical structure topology of BPNN is shown in Fig. 6. BPNN is capable of dealing with complex and nonlinear problems and of fault tolerant. Hence, BPNN is utilized to simulate $L_D(C_v,n)$, $R_D(C_v,n)$, $L_M(C_v,n)$ and $R_M(C_v,n))$ in Eq. (3) as the objective functions. There are 4 BPNN for each objective function with the same structure of BPNN as shown in Tab.1.

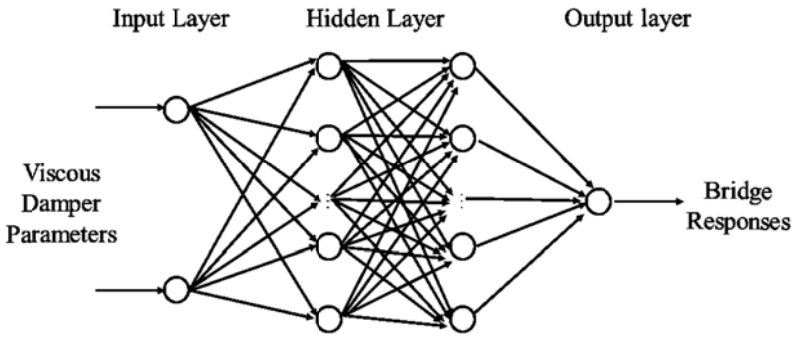

Fig. 6 Structure of BPNN

Tab. 1 Important parameters of the BPNN in the study

Number of neurons for each layer	Input	Hidden -1	Hidden -2	Output
	2	14	13	1
Active function	Sigmod function			
Learning process	Gradient descent algorithm with variable learning rate and momentum			

5.2.2 NSGA-II

NSGA-II (N. Srinivas and Kalyanmoy Deb 1994) (Deb et al. 2002) is a representative and efficient algorithm for multi-objective optimization. Based on NSGA, the modified version NSGA-II was developed which has a better sorting algorithm and incorporates elitism with the new concept of crowding distance. The flowchart of the NSGA-II algorithm is shown in Fig. 7. In the study, the number of initial population and the maximum generation is 100 and 6000, respectively.

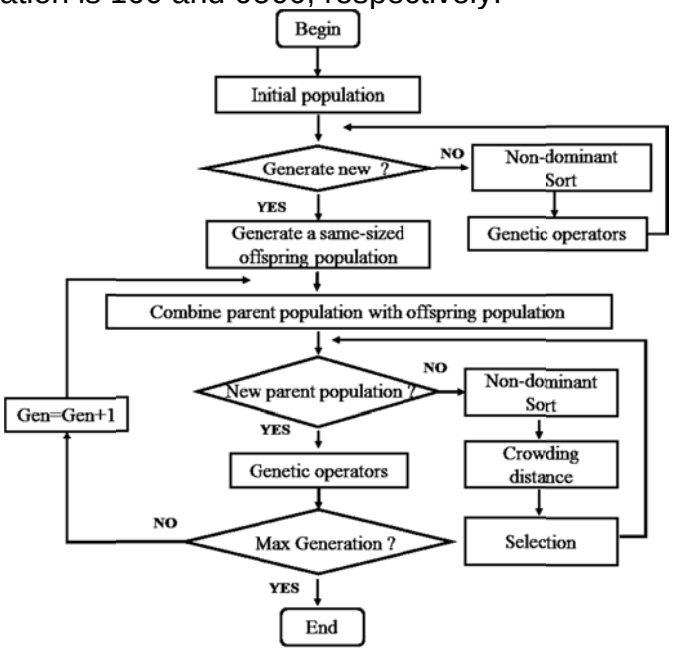

Fig. 7 Flowchart of the NSGA-II algorithm

5.3 Results and Analysis

The optimization is performed by the hybrid method BPNN-NSGA-II, where the four BPNN with good performances are taken as the objective functions in Eq. (3), then

NSGA-II is utilized to do optimization process. After calculation, the Pareto optimal solutions to the parameters of the viscous dampers are shown in Fig. 8.

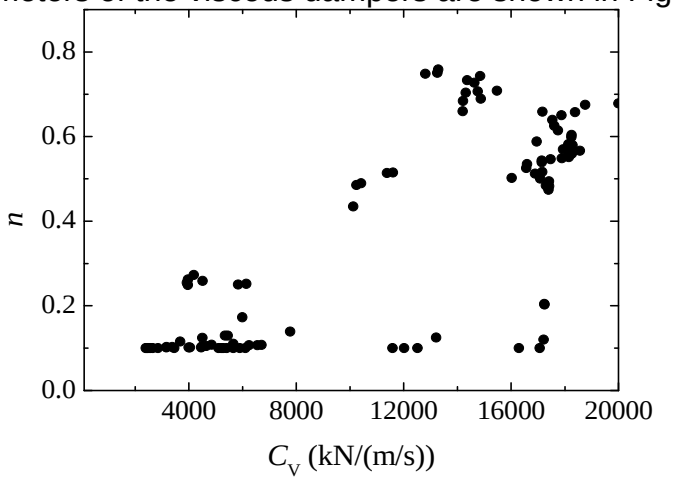

Fig. 8 Pareto optimal solutions to the parameters of the viscous dampers

To filer the Pareto optimal solutions and find the final optimum one, the relative reduction of each response, derived from the bridge with and without the optimized viscous dampers, is defined as Eq. (4), where the subscript 0 represents the response without viscous damper.

$$
\begin{aligned}
R_L_M &= \frac{Abs(L_M - L_M_0)}{L_M}\times 100\% \quad \text{(a)}\\
R_L_D &= \frac{Abs(L_D - L_D_0)}{L_D}\times 100\% \quad \text{(b)}\\
R_R_M &= \frac{Abs(R_M - R_M_0)}{R_M}\times 100\% \quad \text{(c)}\\
R_R_D &= \frac{Abs(R_D - R_D_0)}{R_D}\times 100\% \quad \text{(d)}
\end{aligned}
\tag{4}
$$

Obviously, the relative reduction of each response should be set properly. On the one hand, there will be no suitable solutions if the relative reductions are too large. On the other hand, with small relative reductions, a valid selection could not be conducted. After many trails, all the relative reductions is defined as Eq. (5). Six selection results are shown in Tab. 2.

$$
\begin{aligned}
&R_L_D \geq 50\% \quad \text{and} \quad R_R_D \geq 50\%\\
&R_L_M \geq 10\% \quad \text{and} \quad R_R_M \geq 10\%
\end{aligned}
\tag{5}
$$

Tab. 2 Relative reductions of the responses after selected

Solution	I	II	III	IV	V	VI
C_v (kN/(m/s))	10123	4517	4186	3967	3961	3932
n	0.434	0.259	0.273	0.262	0.249	0.255
R_L_M	25.63	12.52	15.51	14.75	13.16	13.91
R_L_S	65.05	63.82	63.95	63.62	63.29	63.41
R_R_M	14.59	10.91	12.68	12.30	11.45	11.82
R_R_S	50.85	54.95	52.93	53.27	54.35	53.83

About solution I, all the relative reductions except *R_R_S are smaller than those of other* solutions. But the value of C_v is too large to be acceptable with too high cost.

Since the larger the value of C_v, the more expensive the viscous dampers are. The relative reductions derived from solution II to solution VI are close to each other. Integrated with the purpose of the less-cost, the solution VI is chosen as the optimum choice, in which C_v =3932 kN/(m/s). n = 0.255. With the optimum viscous dampers, the longitudinal displacement of the bridge main girder significantly decreases.

6. CONCLUSIONS

Based on the longitudinal dynamics vehicle model, the influence of initial braking speed and position on the key responses of a cable-stayed bridge are systematically investigated. To reduce the responses, parameter sensitivity of viscous dampers is performed. Optimization model is established and the proposed hybrid method BPNN-NSGA-II is utilized to find the optimum parameters. The results show that: a. the effect of the initial braking speed and position on the key longitudinal responses of the bridge is great. The higher the speed, does not mean that the larger the structural response is. The initial braking position has a greater effect on the bridge response; b. the relationships between the parameters of viscous dampers and the key longitudinal responses of the bridge are high nonlinear , which are completely different from each other. Through proposed hybrid method BPNN-NSGA-II, the optimum parameters are found: C_v =3932 kN/(m/s). n = 0.255. The longitudinal displacement of the bridge main girder significantly decreases by the optimized viscous dampers.

REFERENCES

Chou, M., X. Xia, and C. Kayser. 2007. “Modelling and Model Validation of Heavy-Haul Trains Equipped with Electronically Controlled Pneumatic Brake Systems.” *Control Engineering Practice* 15(4): 501–9.

Cole C, Sun Y Q. 2006. “Simulated Comparisons of Wagon Coupler Systems in Heavy Haul Trains.” *Proceedings of the Institution of Mechanical Engineers, Part F: Journal of Rail and Rapid Transit* 220(3): 247–56.

Deb, Kalyanmoy, Amrit Pratap, Sameer Agarwal, and T. Meyarivan. 2002. “A Fast and Elitist Multiobjective Genetic Algorithm: NSGA-II.” *IEEE Transactions on Evolutionary Computation*.

Gupta, Radhey K., and Rupert W. Traill-Nash. 1980. “Vehicle Braking on Highway Bridges.” *Journal of Engineering Mechanics* 106(4).

Kishan, H., and R. W. Traill-Nash. 1977. “A Modal Method of Calculation of Highway Bridge Response with Vehicle Braking.” *Institution of Engineers (Australia) Civ Eng Trans* (1).

Law, S.S., and X.Q. Zhu. 2005. “Bridge Dynamic Responses due to Road Surface Roughness and Braking of Vehicle.” *Journal of Sound and Vibration* 282(3–5): 805–30.

Liu, Jia, Weilian Qu, and Yong Lin Pi. 2010. “Longitudinal Vibration Analysis of Floating-Type Railway Cable-Stayed Bridge Subjected to Train Braking.” In *Mechanic Automation and Control Engineering (MACE), 2010 International Conference On. IEEE,* , , 2806–9.

Liu Huailin, and Lan Haiyan. 2011. “Application of ANSYS in Type Selection of Dampers for Large-Span Bridges.” *Technology of Highway and Transport(Chinese)* 6: 44–48.

Long, Lü, and Jian-Zhong Li. 2015. “Study on Vibration Control Effect of Viscous Dampers for Rail-Cum-Road Cable-Stayed Bridge during Earthquake, Train Braking and Running.” *Engineering Mechanics(Chinese)* 32(12): 139–46.

N. Srinivas and Kalyanmoy Deb. 1994. “Muiltiobjective Optimization Using Nondominated Sorting in Genetic Algorithms.” *Evolutionary Computation* 2(3): 221–48.

Shukla, A K, and T K Datta. 1999. “Optimal Use of Viscoelastic Dampers in Building Frames for Seismic Force.” *Journal of Structural Engineering* 125(4): 401–9.

Tony S. Vader, Cole C. McDaniel. 2007. “Influence of Dampers on Seismic Response of Cable-Supported Bridge Towers.” *Journal of Bridge Engineering* 12(3): 373–379.

Train Traction Calculation Procedure. 1998.

Wongprasert, N, and M D Symans. 2004. “Application of a Genetic Algorithm for Optimal Damper Distribution within the Nonlinear Seismic Benchmark Building.” *Journal of Engineering Mechanics* 130(4): 401–6.

Yang M G, and CS Cai. 2016. “Longitudinal Vibration Control for a Suspension Bridge Subjected to Vehicle Braking Forces and Earthquake Excitations Based on Magnetorheological Dampers.” *Journal of Vibration and Control* 22(17): 3659–78.

Yin Cunxin. 2000. “Study on Nonlinear Static and Dynamic Analysis and Emulation of Additional Longitudinal Forces Railway Bridges.” China Academy of Railway Sciences.

Zhao Zhisong, and Uddin Nasim. 2013. “Field Calibrated Simulation Model to Perform Bridge Safety Analyses against Emergency Braking of Trucks.” *Engineering Structures* 56: 2253–62.